

## AUTOMATIC STRENGTH TESTER - 1 POSITION

## AUTODYN 3



AUTODYN 3 is an upgrade of the latest generation of the well-known Tenso-Lab semi-automatic tensile testers. The new model is distinguished by:

- **Automatic yarn testing mechanism** enabling to perform automatically yarn testing of one bobbin/package, unique feature of the AUTODYN 3 version. This model is replacing Autodyn II (code 2513 and 2514).
- **New hardware:** widening of yarn speed testing range, from very low speed to high speed testing, high accuracy and robustness (can be used to test fibres, single yarns, hanks/LEA, fabrics and garment accessories), direct-drive ball bearing screw.
- **New components:** newly designed clamps with improved performances, additional load cells with higher accuracy level, quick exchange of load cells and clamps/jaws.
- **New open software:** more intuitive and easy to operate, SQL database and standard Ethernet machine connection to data export, no restriction on testing routines (can be created by the enduser, no special skills needed).
- Standard compliance, conforms to major testing methods (ISO, ASTM, JIS, BS, IWS, NEXT, M&S, etc.).
- Complete with:
  - one pair of pneumatic yarn clamps with interchangeable rubber and metal flat jaws
  - bobbin holder and built-in yarn loading arm
  - built-in PC (monitor, keyboard and ink-jet printer available on demand)
- Made in Italy and designed to meet the highest testing standards.




# AUTODYN 3 CODE 2517

## Main Features:

- Built according to the CRE (Constant Rate of Extension) testing principle
- Belt free, direct-drive ball bearing screw
- Automatic pretension and automatic load cell and clamp recognition
- Top quality load cells (manufactured by HBM - Germany), accuracy class:  $\pm 0,02\%$
- Integrated sensor into the motor ensuring accurate clamp positioning (less than 0,02 mm)
- Possibility to perform tests at extremely low speed
- Automatic reset of force values when load cell/clamps are changed
- High resolution of acquired data
- High return speed (7000 mm/min)
- Quick load cell exchange (only 10 sec. compared to 2 min. of previous models)
- Advanced alarm system to prevent accidents; safety clamp movement
- Modern Software, flexible and easy to use, including a series of pre-set standard testing routines. New testing routines can be created by the enduser; no special skills are needed.
- Hysteresis

Mesdan tensile strength tester series is officially approved by Marks & Spencer

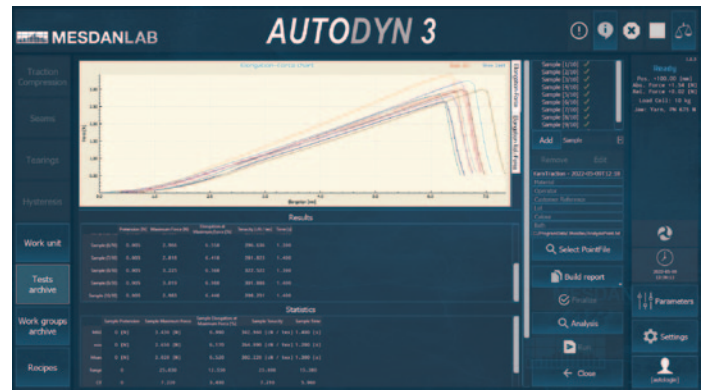

| Load cell capacity | Load cell accuracy | Resolution |
|--------------------|--------------------|------------|
| 10 N               | 0,2 cN             | 0.0001 cN  |
| 20 N               | 0,4 cN             | 0.0002 cN  |
| 100 N              | 2 cN               | 0.001 cN   |
| 500 N              | 10 cN              | 0.005 cN   |
| 1000 N             | 20 cN              | 0.01 cN    |
| 5000 N*            | 100 cN             | 0.05 cN    |

\*Max load capacity: limited to 3000 N

## TECHNICAL CHARACTERISTICS

Single column tensile strength tester, CRE testing principle

|  |   |
|--|---|
| Load Capacity                                  | 3000 N  |
| Speed range                                    | 0.001 to 7000 mm/min  |
| Crosshead travel                               | 900 mm  |
| Position resolution                            | 0.0001 mm   |
| Force measure accuracy                         | $\pm 0.03\%$  |
| Force maximum resolution (load cell of 10 N)   | 0.0001 cN   |
| Force minimum resolution (load cell of 5000 N) | 0.05 cN   |
| Operating temperature                          | from 0°C to +50°C   |
| Frame stiffness                                | 4000 N/mm   |
| Operating humidity                             | +10 to +90% non-condensing  |
| Machine Configuration                          | Table top, base cabinet available                                 |
| Speed accuracy:                                | $\pm 0.01\%$ under stable conditions                              |
| Crosshead guidance                             | double linear slide with four skates integrated within the column |

|  |   |
|--|---|
| Available load cells (Value referred to the effective capacity)                    | 10 N, 20 N, 100 N, 500 N, 1000 N, 5000 N (max load capacity limited to 3000N) |
| HBM 6 wire load cell system with high sensitivity (2mV/V)                          | accuracy class $\pm 0,02\%$ (5000 division)                                   |
| Max speed at full load   | 5000 mm/min   |
| Max returning speed  | 7000 mm/min   |
| Protection against force overload  |   |
| Full machine management via dedicated controller                                   |   |
| User-friendly interface for Windows OS   |   |
| Electric movement of the yarn loading arm  |   |
| Pneumatic movement of the yarn nipper  |   |
| Pneumatic yarn suction   |   |
| Transparent safety cover   |   |
| Available software languages   | Italian, English, Spanish, Chinese  |
| Calibration and verification of the force measuring system according to ISO 7500-1 |   |

## OPTIONAL ACCESSORIES

Wide range of interchangeable load cells (see above table)

Vast range of interchangeable pneumatic and mechanical clamps (for hanks / LEA, fabrics) and jaws\* for fabrics (rubber or metal flat), for seam slippage/Grab (various dimensions), Contact Line for stretch/recovery, for single fibre (pneumatic clamps and pretensioning clips), for fibre bundle ("Pressley" clamps, with holder and torque vice), etc.

|   |                |
|---|----------------|
| Foot switch (necessary for fabric pneumatic clamps)                     | Code 2512E.618 |
| Silent compressor   | Code 3390      |
| ISO 9001 Calibration Report available on demand                         | Code 2510.CC1  |
| ISO 17025 Calibration Certificate (Accredia - ILAC) available on demand |                |

\*Jaws must be always added; not included in the fabric clamps assembly

## OPTIONAL ACCESSORIES

|                  |               |
|------------------|---------------|
| Monitor          | Code 250.300  |
| Keyboard & mouse | Code 250.350  |
| Printer          | Code 250.4    |
| UPS              | Code 2341.900 |

## DIMENSIONS / POWER SUPPLY

Weight: 82 kg  
 Dimensions: (L) 370 x (W) 480 x (H) 1415 mm  
 Power supply: 115-240 Vac, 50/60 Hz, single-phase, 1000 VA, 0.7 kW

Photographs and descriptions of the present leaflet have to be considered as purely indicative and not binding